
## **Exploded View**






To attached the poles, first locate poles with corrosponding numbers. Press down on the snap button to slide the tubes together. To disassemble, press down on the snap button, and pull the poles apart.

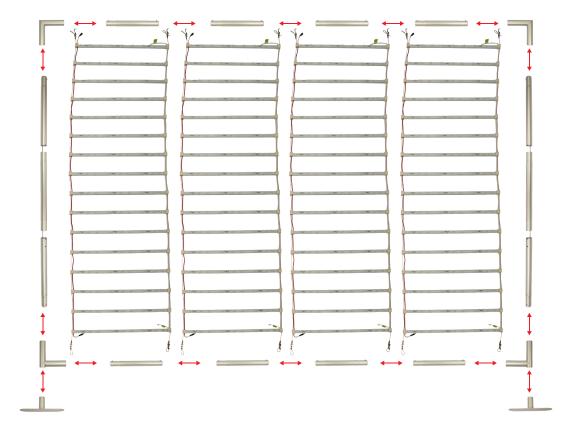

Attached the feet as seen on the picture reference above. Press down on the snap button before sliding the poles together.



Hook the light curtain clips into the two holes located on the top of the connecting tubes. Proceed to then hook the light curtain clips into the two holes located at the bottom connecting tubes. Adjust the tension by pressing down on the clip, and pulling on the cable.



To connect the light curtains together. Find the connecting wires located on the back of the display. The connecting wire will run diagonally across the back, match the identifier with the corrosponding identifier. Step 5



Pull the graphic over the display from the top. Tug down on it until the reaches the base.




Step 6

Zip the graphic at the bottom. Pull wires out from the back.



Locate the slits on the back of the graphic. Plug in the power supply for each light curtain.



The provided light controller will have the animation preinstalled. Connect the light curtain connector as seen.



Attached the power supply to the light controller. An outlet is require to plug in and power the controller for the display.



Connect the light curtain to the light controller. This connector will be found on the bottom right from the back of the display.